



1.

Place the Case on a flat surface and turn your iPad off. If your iPad screen is cracked or damaged, do not install into the Case.

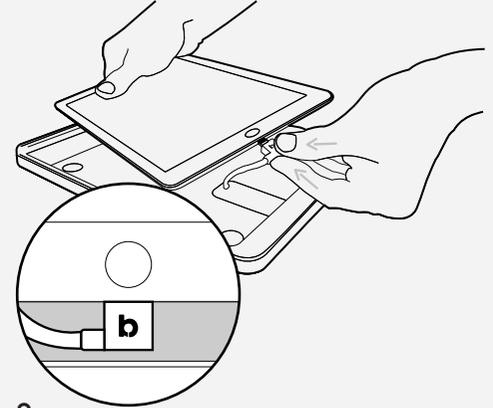


2.

Plug the Lightning connector into your iPad, making sure it is in the orientation shown above.

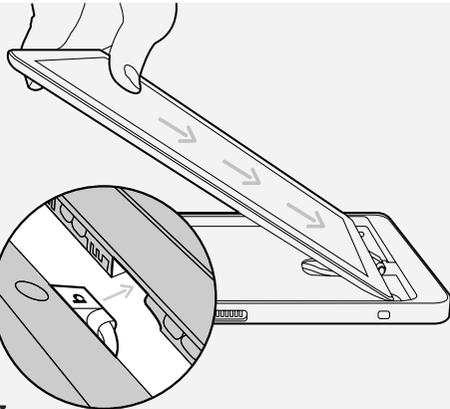


3.

Press your iPad down into the case as shown above, making sure the cable is tucked under the lip.

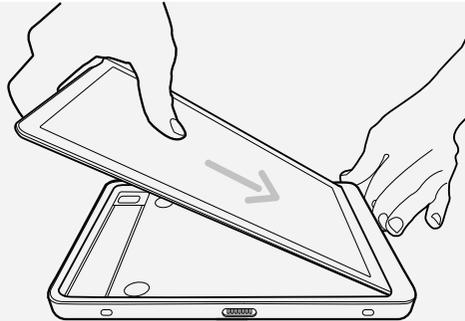


4.

Hold the Case firmly at the cable end and press your iPad into the case, making sure your iPad is tucked under the lip along that edge.

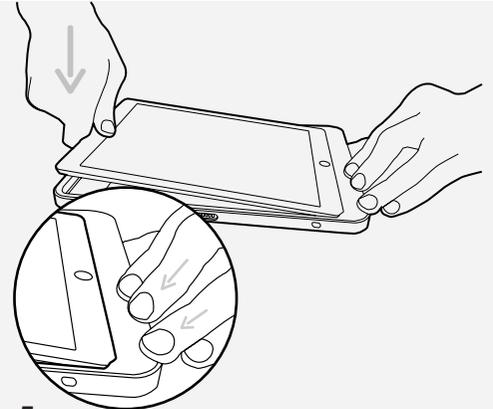


5.

Hold the Case steady and press the opposite end of your iPad down into the Case.

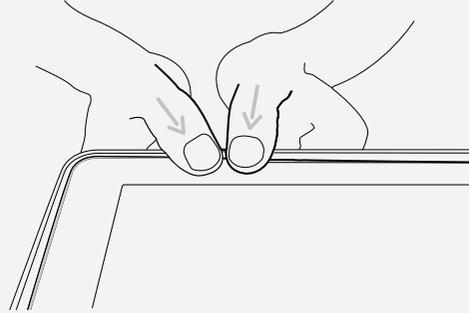


6.

Without pressing directly on the screen, press down along the sides of your iPad to make sure it is under the lip of the Case.

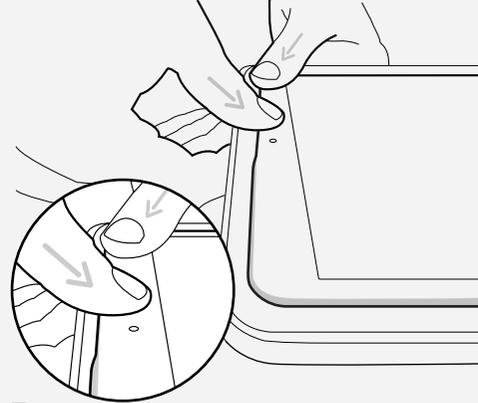


7.

Continue to press down along all sides of your iPad to make sure it is under the lip of the Case.

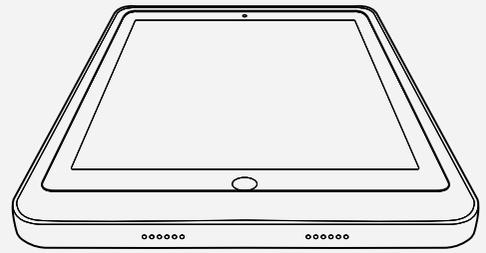

8.

Check to make sure the Case lip isn't pinched under your iPad. This ensures the highest level of drop-proofing.

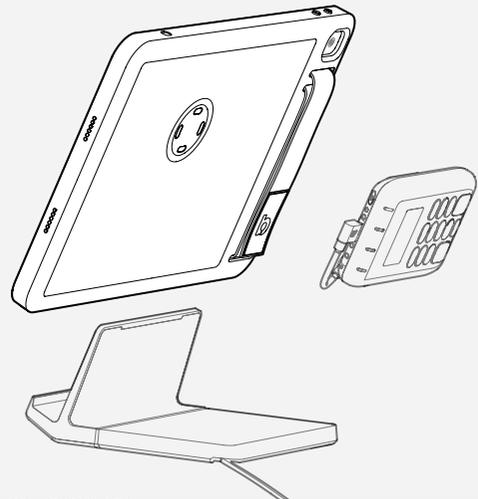


Bouncepad Mobi MagTwist Case
Bouncepad is a Spotspot Ltd brand
© and © 2018 Bouncepad Spotspot Ltd
All rights reserved
UK 5275260
London, United Kingdom
EN-60950-1 Approved
IEC-60950-1 Approved
UK Patent Application No. 1710759.0
bouncepad.com

MOBI BLOCK


INSTALLATION GUIDE

bouncepad®

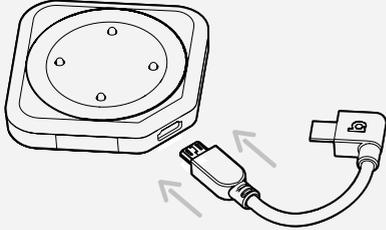


1.

Insert the straight end of the Micro USB cable into the Block.

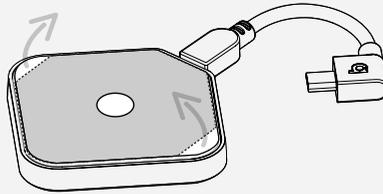


2.

Peel off the corners of the adhesive pad backing.

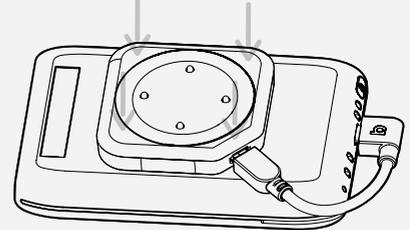


3.

Position the Block on your card reader/ scanner and plug the right-angle end of the cable into your device as detailed overleaf. Ensure that the setup matches the illustration exactly.

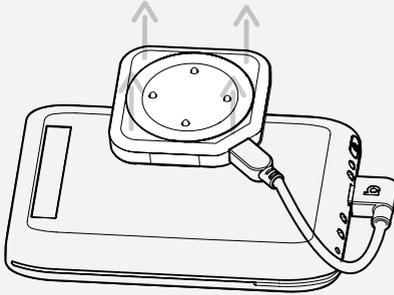


4.

Remove the block from your device, leaving the cable plugged in.

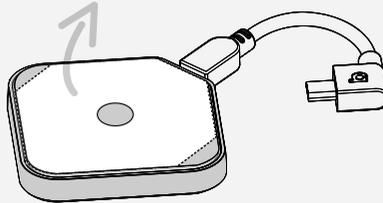

5.

Peel off the remaining backing from the adhesive pad

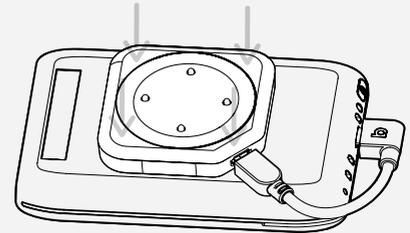


6.

Re-apply the Block on your card reader/ scanner as in Step 3. Press firmly for 10 seconds before use.


MOBI BLOCK

INSTALLATION GUIDE


Socket Mobile SocketScan 800 series

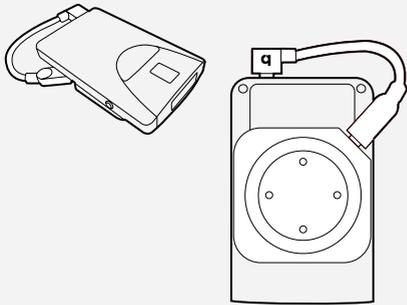


SumUp Air

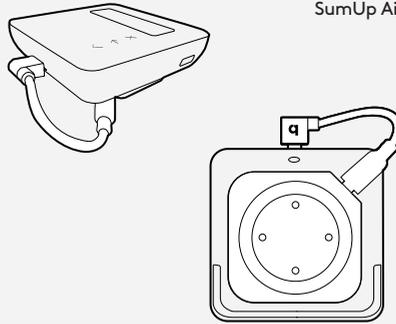


Square Card Reader

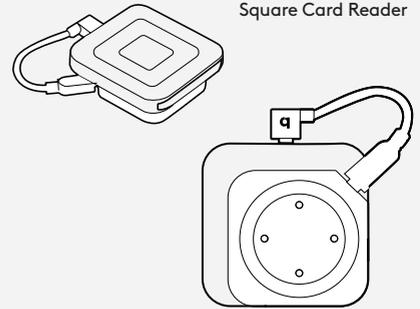


Miura Shuttle

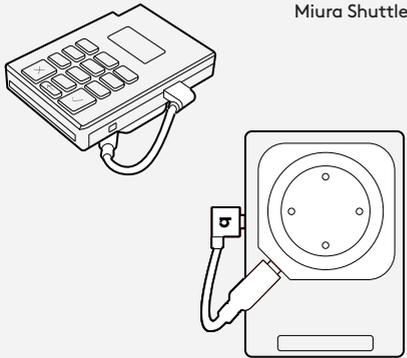

Miura M010

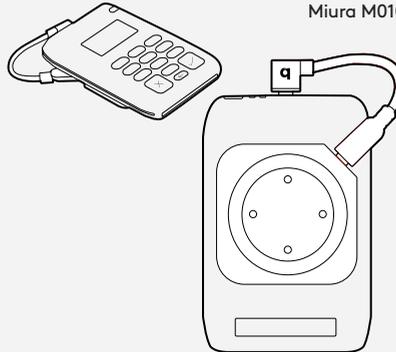

iZettle Card Reader

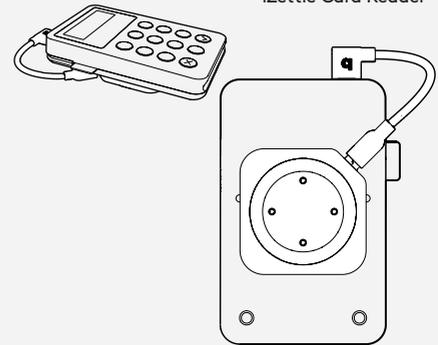


Bouncepad Mobi Block | Bouncepad is a Spotspot Ltd brand | © and ® 2018 Bouncepad Spotspot Ltd

All rights reserved | UK 5275260 | London, United Kingdom


EN-60950-1 Approved | IEC-60950-1 Approved | UK Patent Application No. 1710759.0 | bouncepad.com

MOBI DOCK INSTALLATION GUIDE

bouncepad®

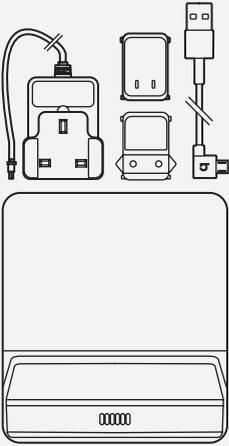


What's in the box?

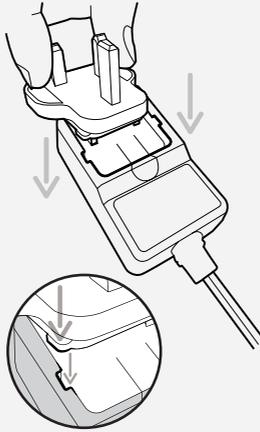


1.

Select your adaptor and push it into the power supply ensuring the tabs and slots align.

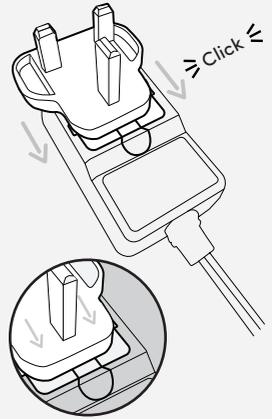


2.

Slide the adaptor towards the cable till it clicks.

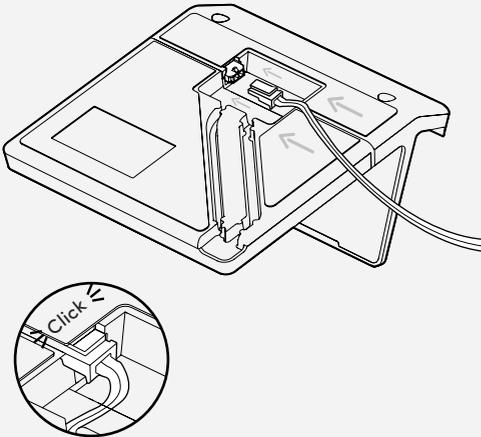


3.

Plug the end of the Bouncepad Power Supply into the Dock till it clicks. To remove the Power Supply, press down firmly on the clip and pull.

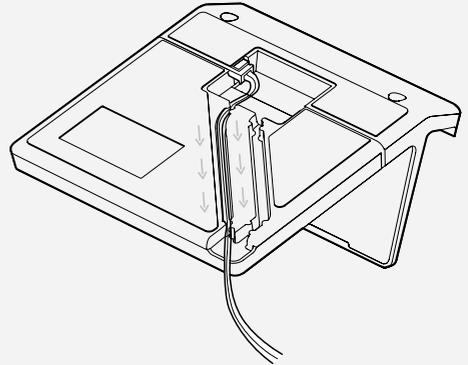


4.

Run the Power Supply cable through the thinner cable channel, pressing firmly at the exit end.

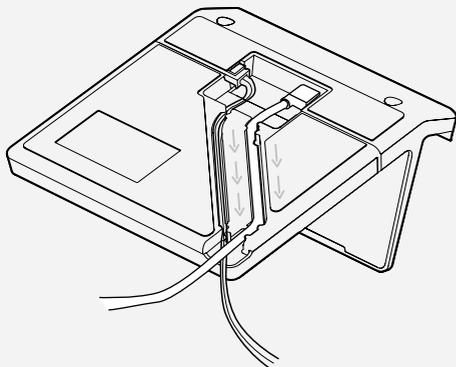


5.

The micro USB cable can be used to sync and backup your iPad. Your iPad will slow charge if the USB is plugged in at the same time as the Power Supply and will not charge with just the Micro USB Cable.

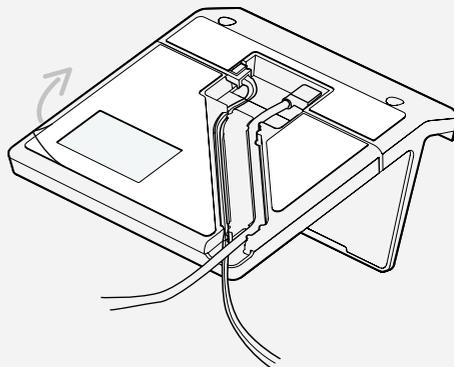

6.

Peel off the film of the non-marking gasket and turn the Dock over, pressing firmly onto a flat, smooth, and clean surface. To clean the gasket, wipe with a damp cloth and allow to dry.

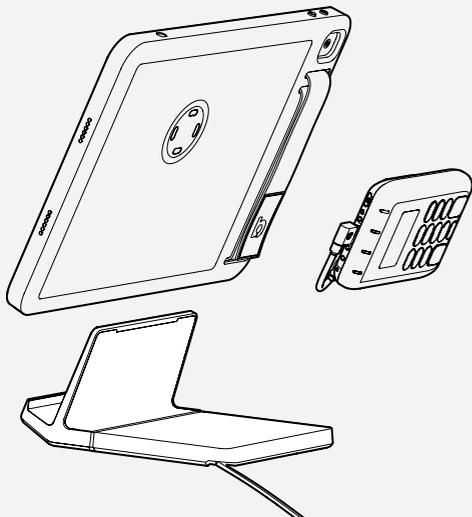

Safety Guide

Use only the correct power supply. Do not use the provided power supply for other applications.

Do not use the Dock above an ambient temperature of 32°C/90°F.

Do not expose Dock to liquids as this could damage the product and could result in electrical shock.

Do not place Dock outside.

Do not place Dock in direct sunlight.

The underside of the Dock can reach high temperatures during charge.